


Profile

- Most-used size in slim design
- Hollow shaft, max. Ø 20 mm
- Counter with 5 decades and fine reading
- Display can be designed for "mm" or "inch"
- Magnifying function for perfect readability
- With stainless-steel driving shaft as an option
- Axial seal, dustproof and hose-proof
- Clamping plate (see accessories)

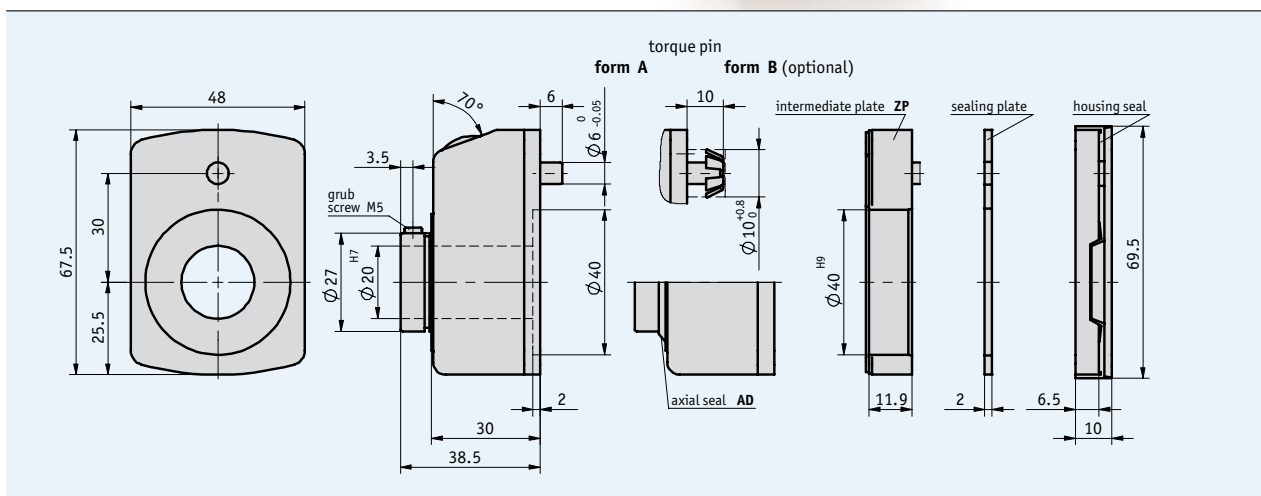

Mechanical data

Feature	Technical data	Additional information
Counter	5 decades, fine reading	
Digit height	approx. 7 mm	
Housing	plastic, reinforced zinc diecasting with housing MCM	
Window	plastic	optional mineral glass
Weight	0.1 kg	
Ambient temperature	max. +80 °C	

■ Max. speed

Indication after 1 st revolution	Max. speed (rpm)
00010	500 (1500)
00015	500 (1000)
00020	500 (750)
00025	500 (600)
00030	500
00040	375
00050	300
00060	250
00080	180
00100	150

$$\text{Formula for max. speed} = \frac{15\,000}{\text{Indication after 1}^{\text{st}} \text{ revolution}}$$

Speeds >500 rpm must only be run for short periods.

