

ION Sensor Network I/O Module



- Single daisy-chain network uses inexpensive cable and significantly reduces system cable lengths
- Ease of installation and maintenance
- Scalable — single or multi-leg system capability
- Available in analog (12 inputs) or discrete (6 inputs, 6 output) versions
- Connect directly to PLC via Modbus RTU
- Easily deploy up to 31 nodes
- DIN rail mountable module for easy installation
- LED indicator for at-a-glance status of power, communication, internal fault and communication fault
- Complete systems update in less than 1 second
- Up to 4,000 foot network cable length
- Input and sensor power terminals are mis-wire and short-circuit protected

Product Information


Analog Input Node (AIN) Features

- Read up to 12 analog sensors such as bearing temperature, belt alignment, belt or shaft speed.
- Read up to 372 analog sensors in one network (all 31 nodes are AIN)


Discrete Input/Output Node (DIO) Features

- Read up to 6 switches or discrete sensor outputs such as panel and limit switches or proximity sensors
- Read up to 186 switches or discrete sensor outputs (all 31 nodes are DIO)

ION Sensor Network I/O Module

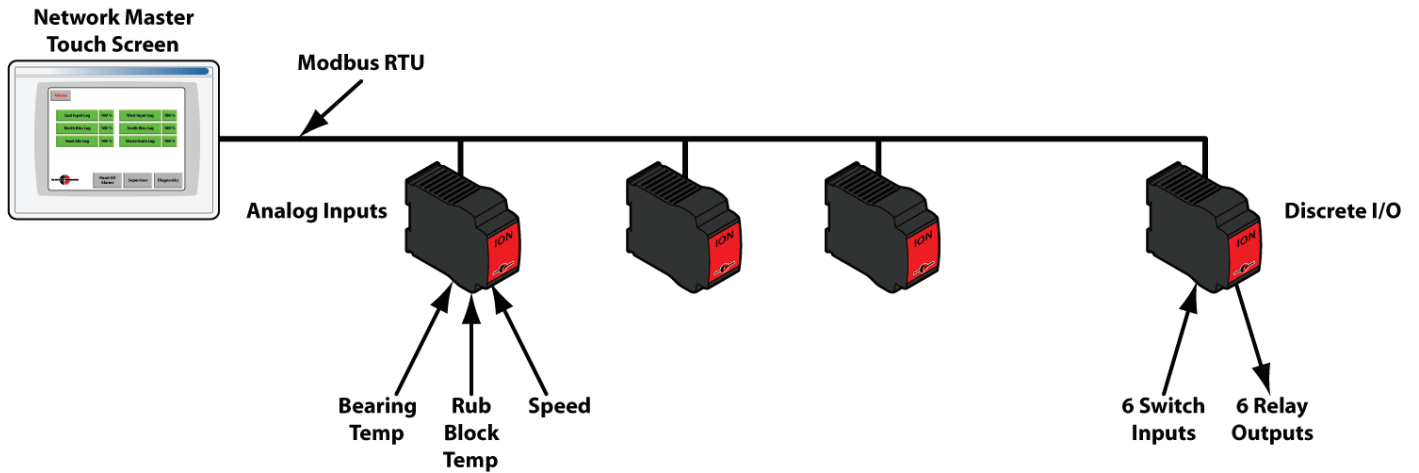

Dimensions

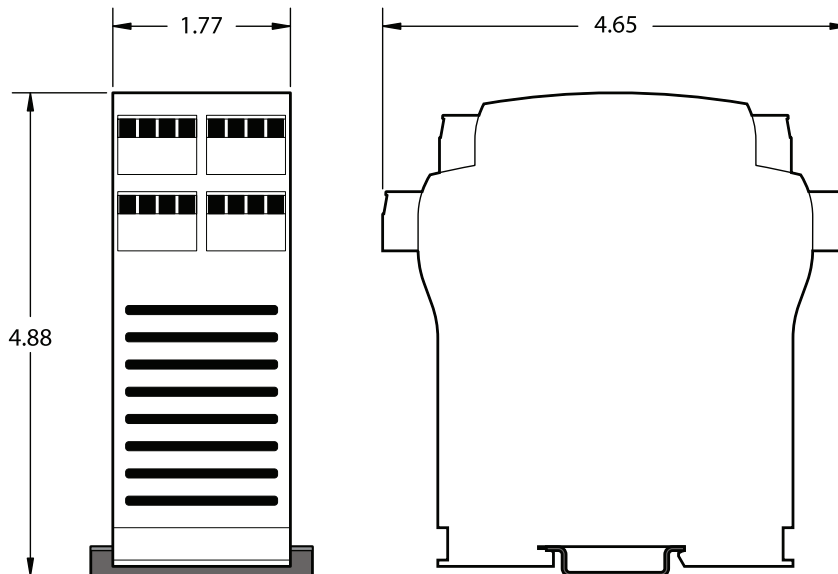

Specifications subject to change without notice.

ES 520 Rev B